

LONG AS YOU LIKE CHANNEL KIT TILE INSERT (LAYL)


316 STAINLESS STEEL

- ✓ Channel - 316 Marine Grade Stainless Steel
- ✓ Outlet size - suits 100mm
- ✓ Brushed Stainless Steel
- ✓ 80mm and 50mm Outlet options available
- ✓ Fully DIY customizable length and outlet position


CODE	DESCRIPTION	FINISH	CTN QTY
13903.12	1200mm SS316 LAYL Kit Tile Insert	Brushed SS	4

Flow
Rate

Intake per
minute 100mm Outlet
per minute
50 litres 50 litres




13993




13994

Please note that a range of installation variables can affect this flow rate, including aerated shower heads, drainage design, floor texture etc.





DETAIL E
SCALE 1 : 1

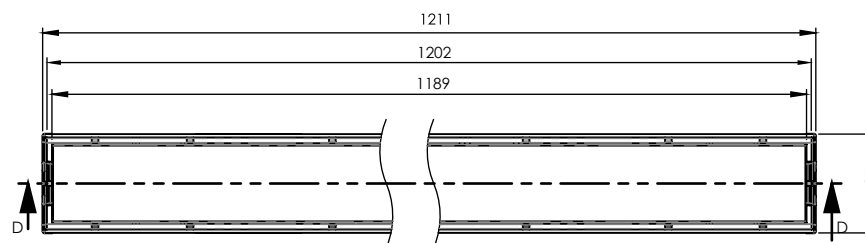

KIT CONTAINS:

- 1 CHANNEL 1205mm
- 2 CHANNEL END CAPS
- 1 TILE TRAY
- 2 TILE TRAY CAPS
- 9 TILE TRAY PLASTIC LEGS
- 1 PLASTIC OUTLET
- 1 PLASTIC STRAINER
- 1 HOLE SAW
- 1 DEBURRING TOOL
- 4 SS POP RIVETS

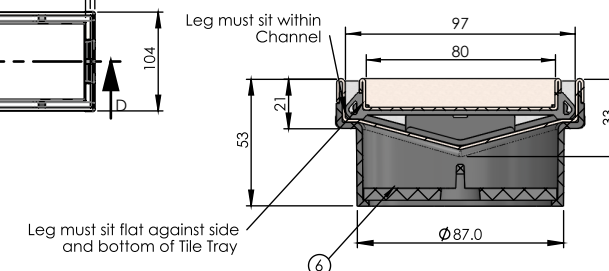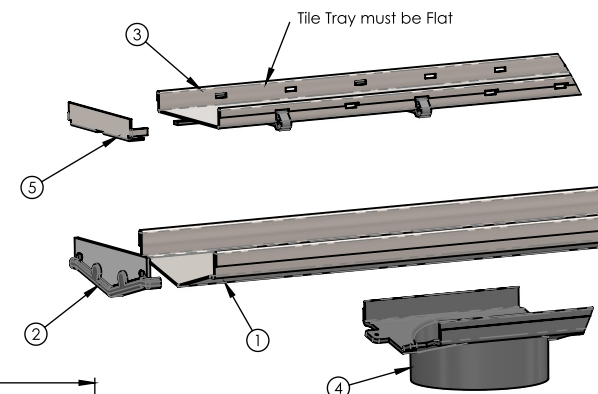

1. Introduction

Art Plumbing Products and Bounty Bathroomware products are manufactured using carefully chosen materials to provide good looks and durability, whilst also complying with the appropriate Australian Standards. Treated with care, our products will offer many years of trouble free service. In order to preserve appearance with minimum effort, we offer the following advice. These recommendations are intended to assist you and are based on our experience and judgment but must not be regarded as amounting to a legal warranty or liability on our part.

2. Environmental Attack

This is caused by chemicals and particles that are present naturally in the air or are caused by activities that release these into the air. The chemicals and particles settle on surfaces and can cause irreversible damage. Areas of high exposure and thus high risk would include those near to the sea, mining activities, high traffic-flow, etc. Particular activities such as fumigation, building activities, chemical leaks, etc. can also cause high exposure. If you live in an area of high exposure or have an incident that causes high exposure you may need to clean more regularly.

3. Cleaning

- Electroplated brass finishes should only be cleaned using a soft cloth and a warm soapy water solution. Surfaces should then be rinsed with clean water and finally dried with a clean soft cloth.
- Avoid using strong chemicals (containing Chlorides, Citric Acid, Acetic Acid or other corrosive substances), abrasives cleaners and scourers.
- Where any chemicals are used in the bath (including bath salts, bubble bath, or cleaning agents), the waste should be thoroughly rinsed with fresh water after the bath is emptied.
- Polishing of Stainless Steel products is recommended utilising any of the commonly available Stainless Steel polishes.
- Chemicals used in the construction process such as Hydrochloric or Muriatic Acid (used to clean tile grout or masonry) that come in contact with Stainless Steel or Electroplated Brass will cause damage and void the product's warranty.